



Medical



Industrial



Test



Broadcast




Comms



Renewable

500W, Configurable, Class I or II AC-DC, power supply

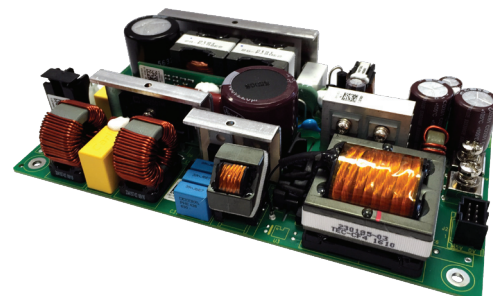

Features	Benefits
• BF ready medical isolation (MOPP)	Eases design into systems (including BF)
• Class I / II with level B EMC	Eliminates need for additional EMC filters
• 1U profile	Enables equipment to be smaller
• Low airflow requirement	Allows quieter system design
• 5 Year Warranty	Low cost of ownership

Input			
Input Voltage	90-264Vac (100-240Vac nominal) able to withstand input voltages of up to 300Vac for up to 5 seconds	Input Frequency	47 - 63Hz
Input Harmonics	EN61000-3-2 compliant	Power Factor	0.95 min at 110Vac input
Input Fuse	Dual fusing (single fuse optional) Time Delay (not user replaceable)	Inrush Current	<40A at 25°C and 265Vac (cold start) (meets EN61000-3-3).
Earth Leakage Current	specified at 264Vac (63Hz). see 'How To Create A Product Description' for options		


Quick Selector (Standard models). Additional variants available - see 'How To Create A Product Description'						
Output		Cover / Chassis / Fan type	Class I		Class II	
Volts	Current		Product Description	Order code	Product Description	Order code
12V	41.6A	Open Frame	XMS500-12-5H-N2NBRInA	XMS5001M	XMS500D-12-5H-N2NBDInA	XMS50024
		U chassis	XMS500-12-5H-N2SBRInA	XMS5003X	XMS500D-12-5H-N2SBDInA	XMS5004F
		Top fan	XMS500-12-5H-TFSBRInA	XMS5005Y	XMS500D-12-5H-TFSBDInA	XMS5006G
24V	20.8A	Open Frame	XMS500-24-5H-N2NBRInA	XMS50070	XMS500D-24-5H-N2NBDInA	XMS5008H
		U chassis	XMS500-24-5H-N2SBRInA	XMS50091	XMS500D-24-5H-N2SBDInA	XMS500BN
		Top fan	XMS500-24-5H-TFSBRInA	XMS500C6	XMS500D-24-5H-TFSBDInA	XMS500DP
36V	13.8A	Open Frame	XMS500-36-5H-N2NBRInA	XMS500FR	XMS500D-36-5H-N2NBDInA	XMS500G8
		U chassis	XMS500-36-5H-N2SBRInA	XMS500HS	XMS500D-36-5H-N2SBDInA	XMS500JT
		Top fan	XMS500-36-5H-TFSBRInA	XMS500KB	XMS500D-36-5H-TFSBDInA	XMS500LV
48V	10.4A	Open Frame	XMS500-48-5H-N2NBRInA	XMS500MC	XMS500D-48-5H-N2NBDInA	XMS500NW
		U chassis	XMS500-48-5H-N2SBRInA	XMS500PX	XMS500D-48-5H-N2SBDInA	XMS500RY
		Top fan	XMS500-48-5H-TFSBRInA	XMS500SG	XMS500D-48-5H-TFSBDInA	XMS500T0

Standard models include:-

'5H' standby (5V / 2A), 'N2' fan supply (12V / 0.3A variable supply voltage) [except on Top fan variants], 'B' touch current (<100µA), 'In' remote on/off (inhibit) and 'A' AC Fail. Class I standard models include 'R' earth leakage (<150µA).

Isolation					
Input to Output	Reinforced	2 x MoPP, 5.7kVdc, 4kVac			
Input to Earth (class I only)	Basic	1 x MoPP, 1.5kVac, 2.3kVdc		Output to Earth (class I only)	Basic
					1 x MoPP, 1.5kVac, 2.3kVdc

How To Create A Product Description

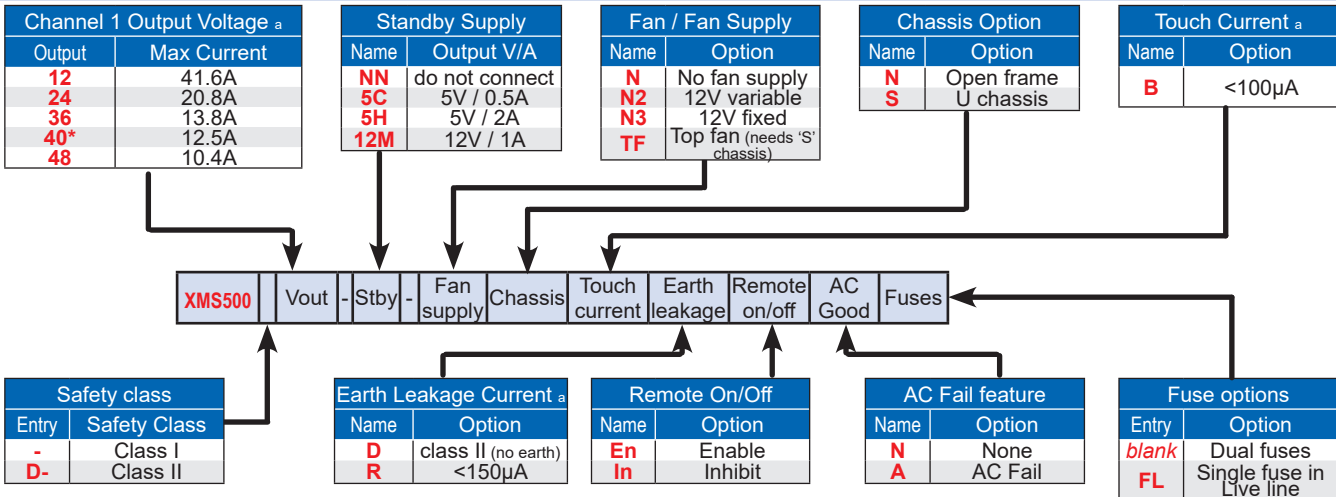

^a - additional variants available, consult sales office

* Confirm availability of required product with sales office

Output Specification

Output Power	500W	Continuous with specified airflow or top fan.
Total Regulation	better than 2%	Including Line regulation of 0.1% (for 90-264Vac input change), Load regulation of 1% (for 0-100% load change) and thermal regulation of 0.02%/°C (0-50°C)
Ripple & Noise	1%	pk-pk, using EIAJ test method & 20MHz bandwidth
Voltage Setting Accuracy	±1%	at 50% load
Turn on Time	1.0s max	at 90 Vac & 100% rated output power
Efficiency	up to 92%	At 230Vac, 100% load
Hold up	16ms	minimum at 100% load 20ms holdup option available, consult sales office for details.
Min Load	None	
Transient Response		
Deviation	<5%	of set voltage for 25% to 100% load change
Recovery time	<2ms	for recovery to 2% of set voltage
Short circuit protection	Yes	Hiccup mode, auto recovery after removal of short circuit
Over Temperature protection	Yes	Latching, need to cycle ac to restart unit.
Over Voltage Protection	Yes	Latching, need to cycle ac to restart unit.
Series connection	Yes	2 units maximum (consult sales office for details)
Parallel connection	No	

Signals

Remote on/off J2, pin 5	Enable (-En option) - Apply 5V to enable channel 1. Open circuit or 0V to inhibit. Inhibit (-In option) - Apply 5V to inhibit channel 1. Open circuit or 0V to enable. Maximum current required = 2mA
AC Fail	Provides ac fail functionality. Logic high = ac fail, 0V = ac good.

Additional Outputs

Fan supply options	N	None
	N2	12V / 0.3A (with 12V output, 0.15A with all other outputs). Output voltage varies with heat sink temperature. See application note for details.
	N3	12V / 0.3A (with 12V output, 0.15A with all other outputs). Constant voltage.
	TF	Top fan (fan supply not for customer use as used by factory fitted top fan)
Standby Supply options	NN	None
	5C	5V / 0.5A
	5H	5V / 2A
	12M	12V / 1A


Environment	
Temperature	0°C to 50°C operational Full load with top fan (TF) fitted or 1m/s air blown (approximately 10 CFM). See handbook for maximum component temperatures. Convection cooled operation is possible by maintaining the specified component temperatures. Storage -40°C to 85°C (70°C for Top Fan versions) (max 12 months).
Derating	50°C to 70°C, derate output by 2.5% per °C
Low Temp Startup	-20°C
Humidity	5 - 95% RH non condensing
Shock	±3 x 30g shocks in each plane, total 18 shocks 30g shock = 11ms (+/-0.5msec), half sine Conforms to EN60068-2-27, EN60068-2-47, IEC68-2-27, IEC68-2-47, JIS C0041-1987. Conforms to MIL-STD-810G, Method 516.6, Pro I, IV, VI
Vibration	Single axis 10 - 200 Hz at 2g (sweep and endurance at resonance) in all 3 planes Conforms to EN60068-2-6, IEC68-2-6 Conforms to MIL-STD-810G, Method 514.4, Pro I, Cat 1,9
Altitude	-200 to 5000 metres operational (3000m for 60601-1) (-200 to 5000m storage/transportation)
Pollution	Degree 2, Material group 3

Emissions EN61000-6-3		
Radiated Emissions	EN55011, EN55032	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B see application note for details
Conducted Emissions	EN55011, EN55032	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B
Conducted Harmonics	EN61000-3-2	Class A
Flicker	EN61000-3-3	Compliant - d _{max} only


Immunity EN61000-6-2:2005				Criteria
Electrostatic Discharge	EN61000-4-2	Level 4	Only when fitted in a chassis Level 3 on I/O / signal pins	A
Electromagnetic Field	EN61000-4-3	Level 3		A
Fast / Burst Transient	EN61000-4-4	Level 4		A
Surge Immunity	EN61000-4-5	Level 3		A
Conducted RF Immunity	EN61000-4-6	Level 3		A
Power Frequency Magnetic Field	EN61000-4-8	Level 3		A
Voltage Dips, Variations, Interruptions	EN61000-4-11	Class 3	Criteria B for 5 sec interruption Criteria B for 1 cycle interruption	A
Ring Wave	EN61000-4-12	Level 3		A
Voltage Fluctuations	EN61000-4-14	Class 3		A

Approvals / Accreditations	
IEC/EN 60950-1, UL60950-1 / CSA 22.2 No 60950-1	File E135494
IEC/EN 60601-1, UL/CSA 60601-1, ANSI/AAMI ES60601-1 CAN/CSA-C22.2 No 60601-1-08	File E349607
IEC/EN 61010-1 (designed to meet)	
IEC/EN/UL/CSA 60065 (designed to meet)	
CE Mark (EN60950-1)	Low Voltage Directive (LVD)
CB certificate and Report available on request	Please check with technical sales for status of approvals
Designed and manufactured under the control of ISO9001 and ISO13485 (including risk management).	

Outline & Connection Drawings - Class I (with earth)

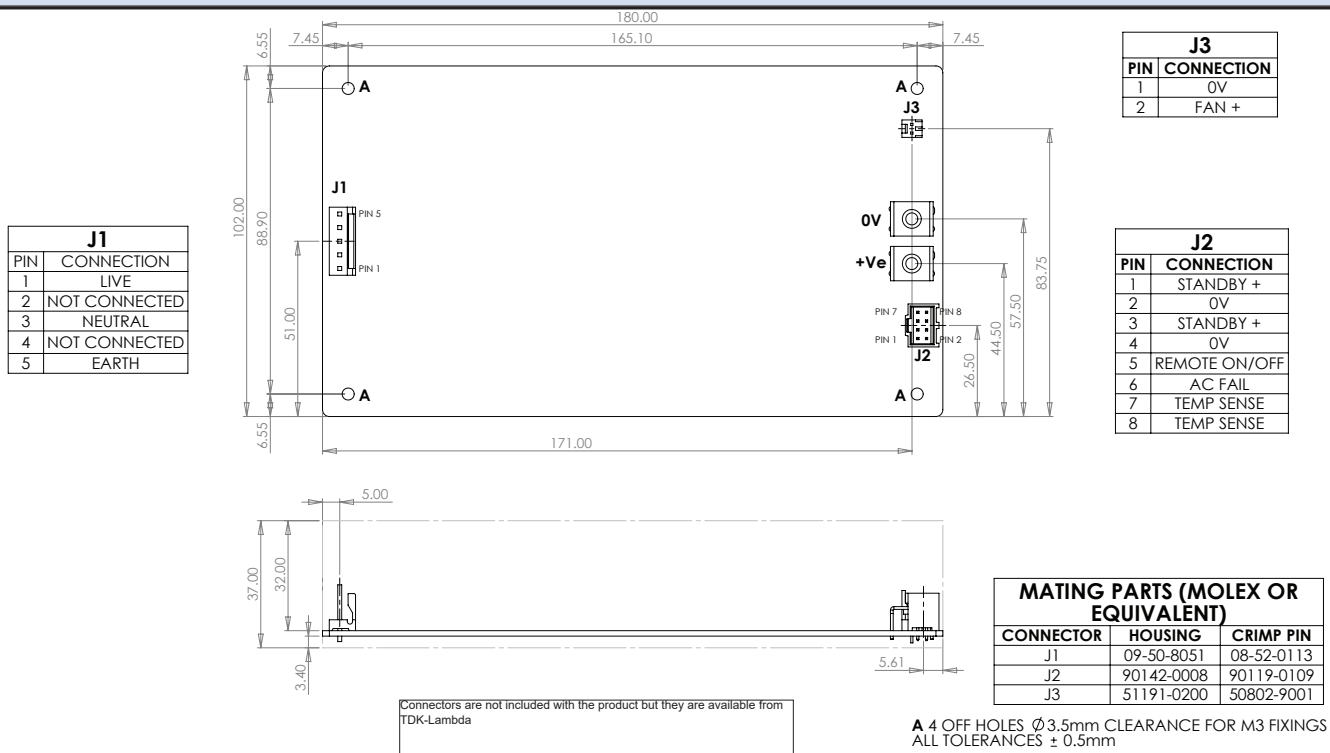


Outline & Connection Drawings - Class II product

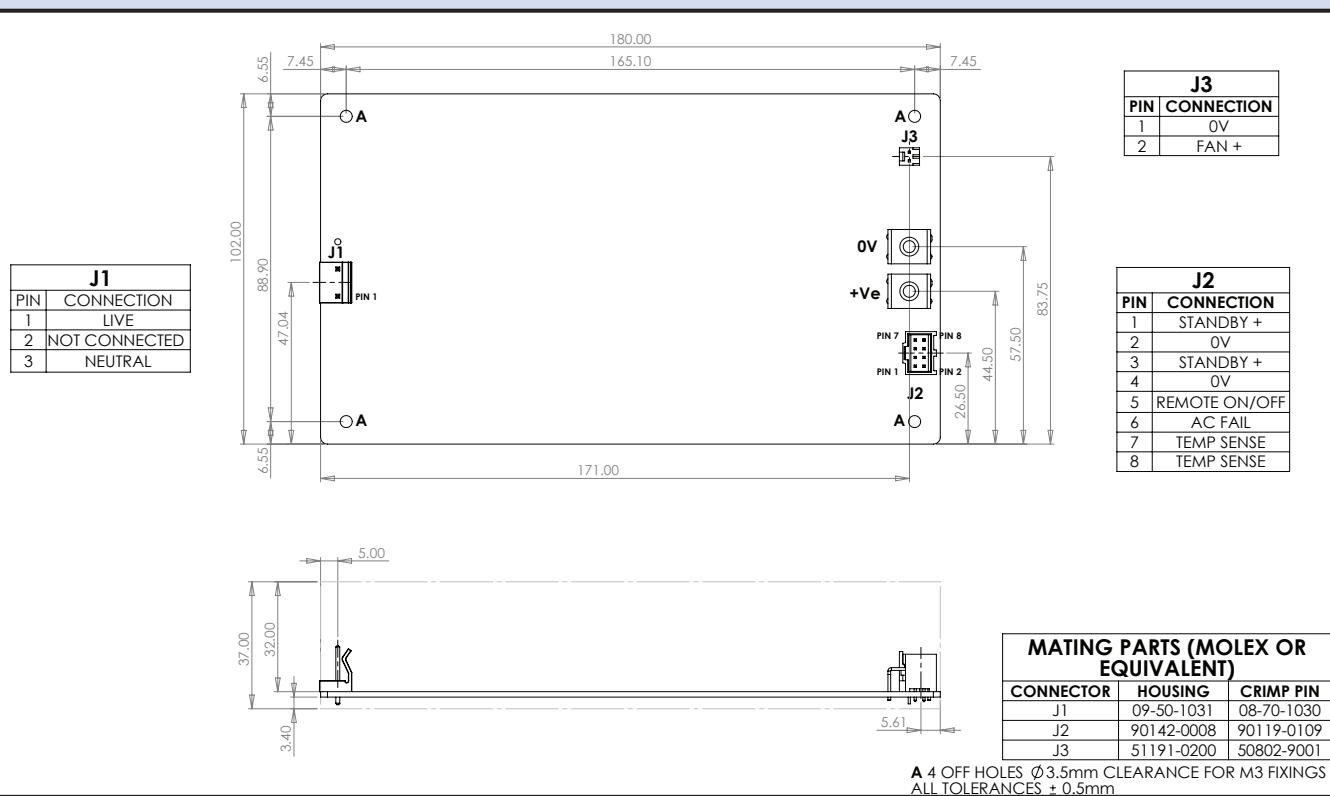


Outline Drawings

STANDARD CHASSIS + TOP FAN

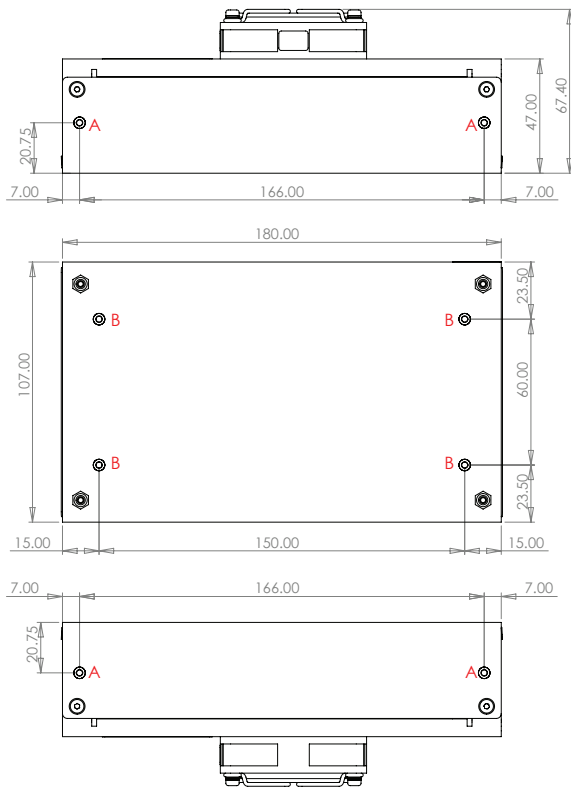

STANDARD CHASSIS

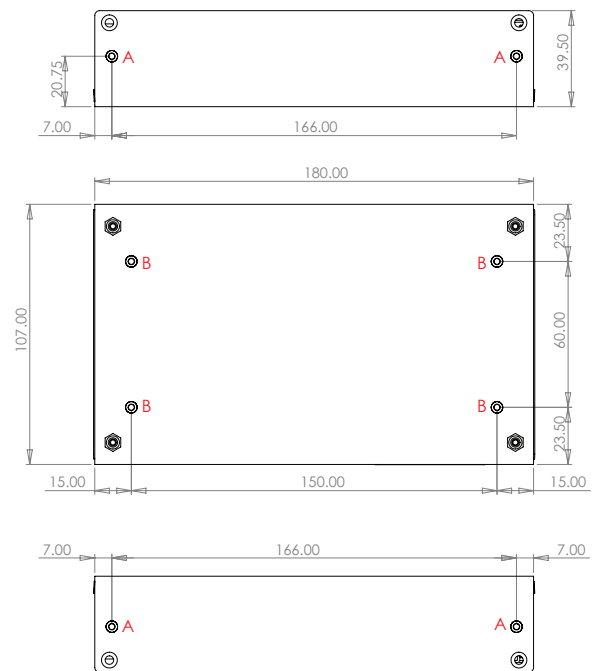

A HOLES: 4 OFF FIXING HOLES FOR M3, MAXIMUM PENETRATION 3mm.
B HOLES: 4 OFF FIXING HOLES FOR M3 MAXIMUM PENETRATION 2.4mm
 MAXIMUM TORQUE 0.5-0.6Nm
 ALL TOLERANCES ± 0.5 mm



TDK-Lambda France SAS

3 Avenue du Canada
Parc Technopolis
Bâtiment Sigma
91940 les Ulis
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office

Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands

info@nl.tdk-lambda.com
www.nl.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info@at.tdk-lambda.com
www.de.tdk-lambda.com



Switzerland Sales Office

Bahnhofstrasse 50
8305 Dietlikon
Switzerland
Tel: +41 44 850 53 53
Fax: +41 44 850 53 50
info@ch.tdk-lambda.com
www.de.tdk-lambda.com



Nordic Sales Office

Haderslevvej 36B
DK-6000 Kolding
Denmark
Tel: +45 2911 9556
info@dk.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



TDK-Lambda Ltd.

Kibbutz
Givat Hashlosa 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



C.I.S.

Commercial Support:

Tel: +7 (495) 665 2627

Technical Support:

Tel: +7 (812) 658 0463
info@tdk-lambda.ru
www.tdk-lambda.ru

Local Distribution